

Bomba Solar Impulsor PP




PUMP PERFORMANCE

TYPE	VOLTAGE V	POWER W	MAX FLOW RATE m ³ /h	MAX HEAD m	OUTLET SIZE In	DIAMETER mm
3TSC2.2-12-24/120	24	120	2.2	12	1"	76
3TSC1.9-23-36/210	36	210	1.9	23	1"	76
3TSC2.0-80-48/500	48	500	2	80	1"	76
3TSC3.5-50-48/500	48	500	3.5	50	1"	76
4TSC5.5-40-48/500	48	500	5.5	40	1.25"	100
4TSC4.0-57-48/500	48	500	4.0	57	1.25"	100
4TSC3.1-66-48/500	48	500	3.1	66	1.25"	100
4TSC2.5-70-48/500	48	500	2.5	70	1.25"	100
4TSC4.0-96-110/1000	110	1000	4.0	96	1.25"	100
4TSC5.2-72-110/1000	110	1000	5.2	72	1.25"	100
4TSC8.0-48-110/1000	110	1000	8.0	48	2"	100
4TSC12.5-44-110/1000	110	1000	12.5	44	2"	100
4TSC16.5-33-110/1000	110	1000	16.5	33	2"	100
4TSC4-200-300/3000	300	3000	4	200	1.2"/1.5"	100
4TSC8-100-300/2200	300	2200	8	100	1.2"/1.5"	100

4TSC4.0-96-110/1000 Equipo Disponible

Bomba Solar Impulsor PP

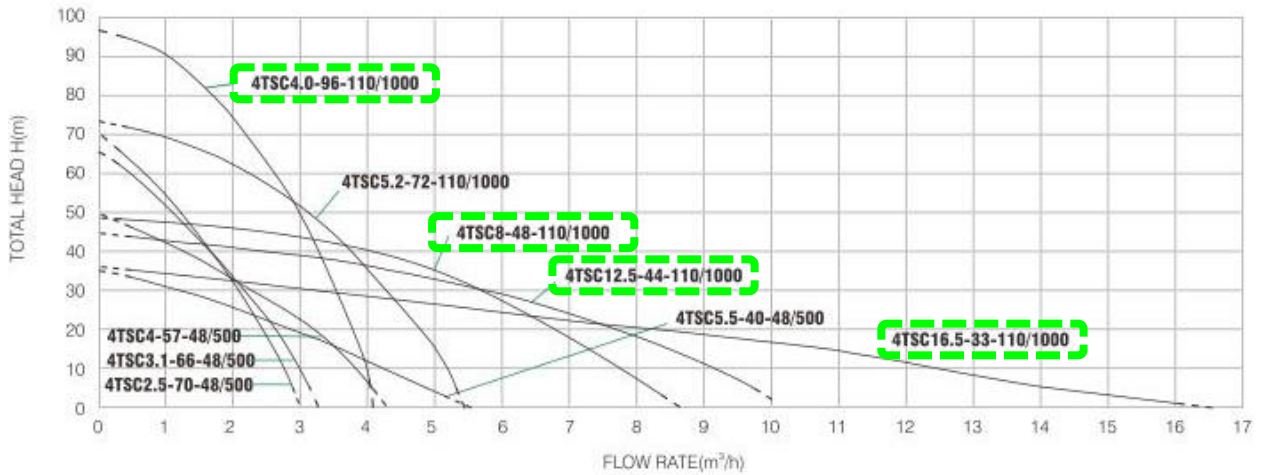

 Equipo Disponible