

Bomba Solar Impulsor Acero Inoxidable





Pump Performance

Type	Voltage (v)	Power (w)	Max Flow Rate (m³/h)	Max Head (m)	Outlet Size (In)	Diameter (In)
4TSSC3.5-24-36/300	36	300	3.5	24	1.25"	4"
4TSSC4-62-48/500	48	500	4	62	1.25"	4"
4TSSC7.5-34-48/500	48	500	7.5	30	1.25"	4"
4TSSC5-128-110/1000	110	1000	5	123	1.25"	4"
4TSSC5.5-90-110/1000	110	1000	5.5	90	1.25"	4"
4TSSC6.7-88-110/1000	110	1000	6.7	82	1.5"	4"
4TSSC7.5-70-110/1000	110	1000	7.5	70	1.5"	4"
4TSSC18-29-110/1000	110	1000	18	29	2"	4"
4TSSC12-53-110/1000	110	1000	12	53	2"	4"
4TSSC4-190-150/1500	150	1500	4	190	1.25"	4"
4TSSC7-130-150/1500	150	1500	7	130	1.5"	4"
4TSSC12-77-150/1500	150	1500	12	77	2"	4"
4TSSC18-60-150/1500	150	1500	18	60	2"	4"
4TSSC4-215-220/2200	220	2200	4	215	1.25"	4"
4TSSC5-195-220/2200	220	2200	5	195	1.25"	4"
4TSSC12-108-220/2200	220	2200	12	108	2"	4"
4TSSC7.5-175-220/2200	220	2200	7.5	175	1.5"	4"
4TSSC20-47-220/2200	220	2200	20	47	2"	4"
4TSSC4-300-300/3000	300	3000	4	300	1.25"	4"
4TSSC7-220-300/3000	300	3000	7	220	1.5"	4"
4TSSC12-140-300/3000	300	3000	12	140	2"	4"
4TSSC20-80-300/3000	300	3000	20	80	2"	4"

 Equipo Disponible

Bomba Solar Impulsor Acero Inoxidable

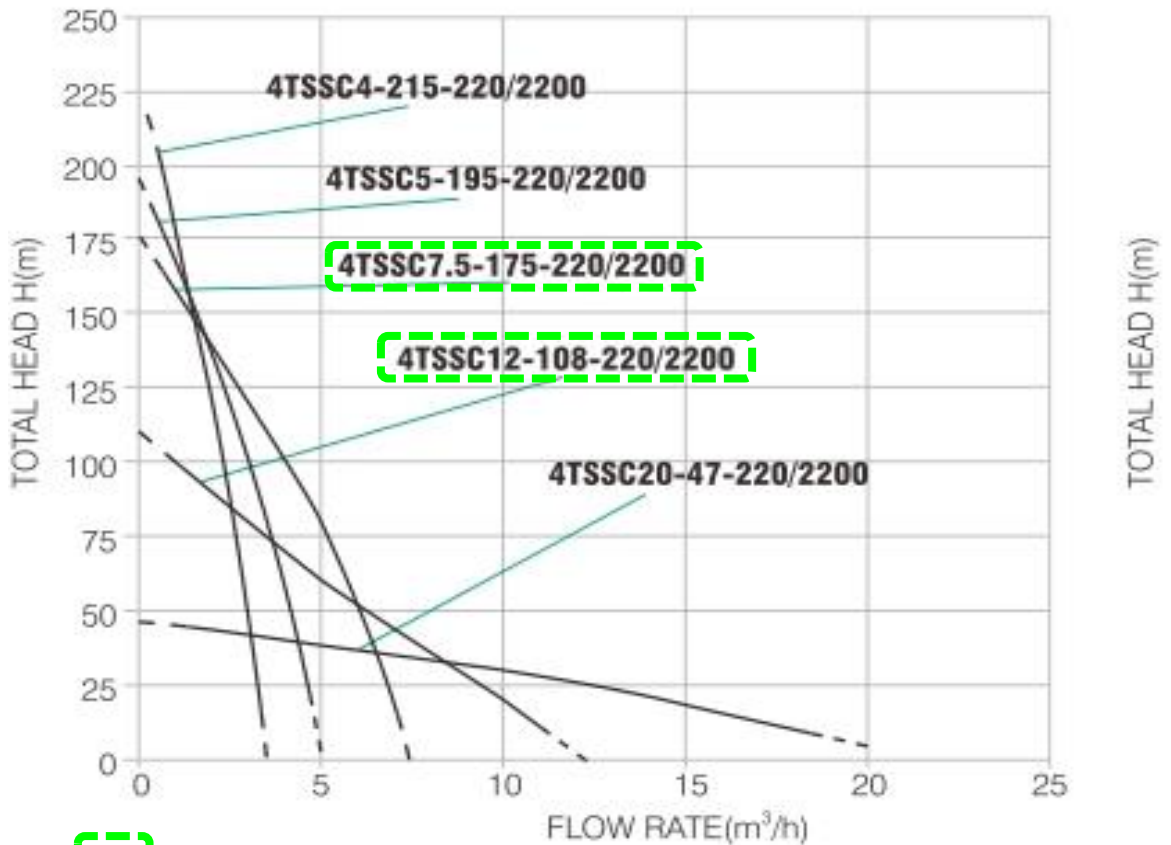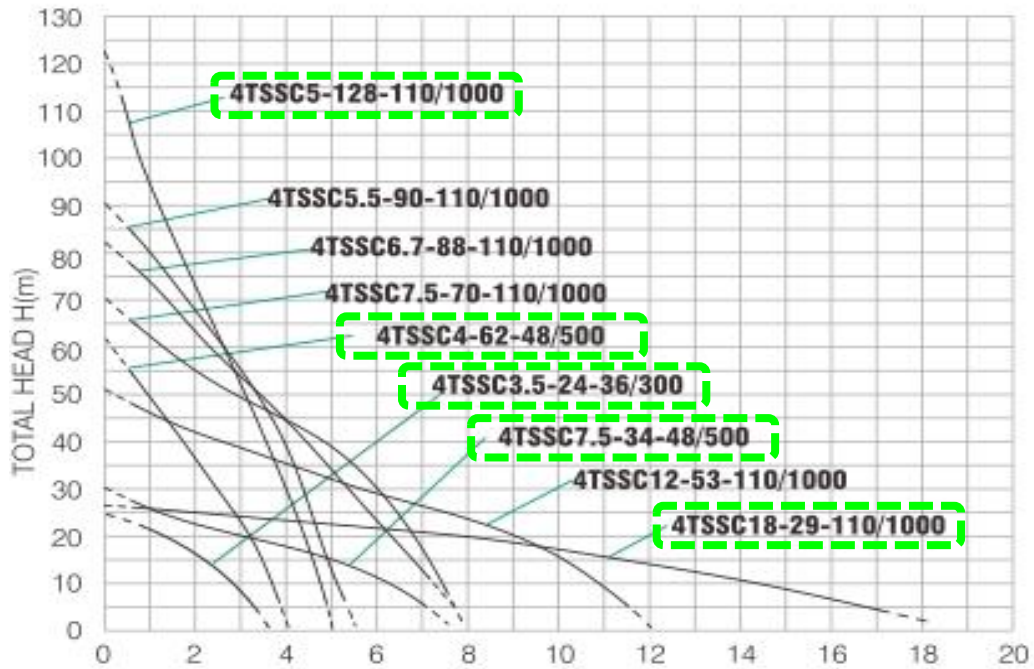

 Equipo Disponible