


# SLP170S-24


High Efficiency Monocrystalline PV Module

Electrical Characteristics	SLP170S-24
Product code	170022402
Maximum power (Pmax)	170W
Voltage at Pmax (Vmp)	34.8V
Current at Pmax (Imp)	4.86A
Open-circuit voltage (Voc)	43.4V
Short-circuit current (Isc)	5.24A
Temperature coefficient of Voc	-(80±10)mV/°C
Temperature coefficient of Isc	(0.065±0.015)%/°C
Temperature coefficient of power	-(0.5±0.05)%/°C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	1000V DC
Power tolerance	± 3%

\*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C  
 \*NOCT: Nominal operating cell temperature (the data is only for reference)

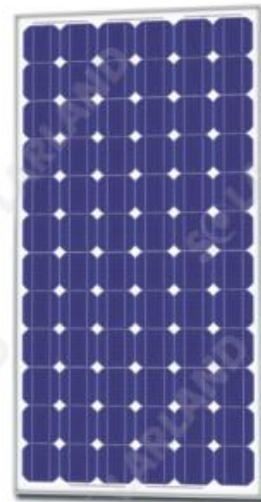


## Module Diagram

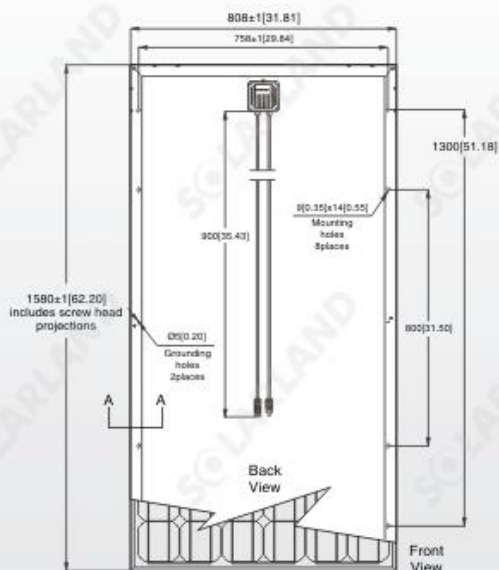


Dimensions in brackets are in inches.

Un-bracketed dimensions are in millimeters.

Unit: mm/[in.]



Junction Box  
Top View (Lid Open)




Section A-A

## Features

- Nominal 24V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron, tempered glass.
- Rugged design to withstand high wind pressure, hail and snow load.
- Aesthetic appearance.

## Characteristics

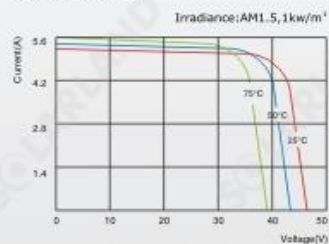

SLP170S-24 I-V Curves

Specifications	SLP170S-24
Cells	Monocrystalline silicon solar cell
No. of cells and connections	72(6X12)
Module dimension	1580mm[62.20in.]x808mm[31.81in.]x35mm[1.38in.]
Weight	16.5kg[36.38lbs]
Packing information(Carton)	1625mm[63.98in.]x855mm[33.66in.]x70mm[2.76in.]/1pc/ctn

\*Limited warranty: 5-year limited warranty of materials and workmanship; 10-year limited warranty of 90% power output; 25-year limited warranty of 80% power output. For detail, please contact us.  
 \*Specifications are subject to change without notice at any time.